

pop show
live modern concert retro guitar rock
play musician singer song
melody earphone
microphone stereo popular music retro
amplifier performance wave karaoke
sound energy heart entertainment fantasy
voice concert performance plug live stage instrument headphones
audio mp3 bluetooth night disco young radio melody concept
passion

2023

buyer's guide



Stranger

Sound with expression

▶ DUAL CHANNEL POWER AMPLIFIER



SPB5K

2 x 2500 Watts RMS Output at 2 Ohms. | Balance & Unbalance Input.
Force Cooling by 2Nos. 4" DC Fan. | Output VU Bar Graph LED.
Protection: Temp, DC, RFI, Short Circuit, Overload, Mains over Voltage.
Power Supply: AC 220V 50 Hz.
Dimension: 483 (W) x 590 (D) x 155 (H) mm.
Weight: 36.310 kg. (approx.)



SPB4K

2 x 2000 Watts RMS Output at 2 Ohms. | Balance & Unbalance Input.
Force Cooling by 2 Nos. 4" AC Fan. | Output VU Bar Graph LED
Protection: Temp, DC, RFI, Short Circuit, Overload, Mains over Voltage.
Power Supply: AC 220V 50 Hz.
Dimension: 483 (W) x 562 (D) x 155 (H) mm.
Weight: 31.640 kg. (approx.)



SPB3K

2 x 1500 Watts at 2 Ohms. | Bridge mode 3000 W at 4 ohms load | Horn.
Balance & Unbalance Input | Force Cooling by 2 Nos. 4" AC Fan.
Output VU Bar Graph LED.
Protection: Temp, DC, RFI, Short Circuit, Overload, Mains over Voltage.
Power Supply: AC 220V 50 Hz.
Dimension: 483 (W) x 510 (D) x 155 (H) mm.
Weight: 29.580 kg. (approx.)



SPB2K

2 x 1000 Watts RMS Output at 2 Ohms Load.
Bridge mode: 2000 W at 4 Ohms load.
Balance & Unbalance Input.
Force Cooling by 2 Nos. 4" AC Fan. | Output VU Bar Graph LED.
Protection: Temp, DC, RFI, Short Circuit, Overload, Mains over Voltage.
Power Supply: AC 220V 50 Hz.
Dimension: 483 (W) x 480 (D) x 155 (H) mm. | Weight: 24.630 kg. (approx.)



SPB1400

2 X 700 Watts RMS output at 2 ohms load.
Bridge Mode: 1400 W at 4 ohms load | Balance & Unbalance Input.
Force Cooling by 2 nos. 4" AC Fan | Low & High Equilisation.
Protection: Temp, DC, RFI, Speaker Protection, Short Circuit, Overload & Mains over Voltage.
Power Supply: AC 220 V 50 Hz.
Dimension: 843 (W) x 480 (D) x 155 (H) mm. | Weight: 21.170 kg. (approx.)

▶ AUDIO POWER AMPLIFIER



PBT1000

1000 Watts RMS Output at 1 / 2 / 4 Ohms. 70 / 100 Volts.
3 Way Tone Control. | Horn / Speaker Switch. | Force Cooling.
EQ / Flat Switch. | Input : Line 1V / 10K Ohms & Mic. 0.8 mv.
Protection: AC Bi-Metal Circuit Breaker, Short Circuit & Over Temperature
with Visual LED Indication. | Power Supply: AC 220V 50 Hz.
Dimension: 510 (W) x 505 (D) x 155 (H) mm. | Weight: 35.240 kg. (approx.)



PBT800

800 Watts RMS Output at 1 / 2 / 4 Ohms by jumper setting, 70 / 100 Volts.
3 Way Tone Control. | Horn / Speaker Switch. | Force Cooling.
EQ / Flat Switch. | Input Line 1V / 10K Ohms & Mic. 0.8 mv.
Protection: Temp, DC, RFI, Short Circuit, Overload, Mains over Voltage.
Output Level LED. | Power Supply: AC 220V 50 Hz.
Dimension: 510 (W) x 460 (D) x 155 (H) mm. | Weight: 25.850 kg. (approx.)

▶ AUDIO POWER AMPLIFIER

PBT701

700 Watts RMS Output at 2 / 4 Ohms. 70 / 100 Volts. | Output Level LED.
3 Way Tone Control. | Horn / Speaker Switch. | Force Cooling.
Input Line 1V / 10K Ohms. | Protection: AC Bi-Metal
Circuit Breaker, Short Circuit & Over Temperature with Visual LED Indication.
Power Supply: AC 220V 50 Hz.
Dimension: 483 (W) x 460 (D) x 155 (H) mm. | Weight: 25.530 kg. (approx.)

PBT501

500 Watts RMS Output at 2 / 4 Ohms. 70 / 100 Volts. | Output Level LED.
3 Way Tone Control. | Horn / Speaker Switch. | Force Cooling.
Input Line 1V / 10K Ohms. | Protection: AC Bi-Metal Circuit Breaker,
Short Circuit & Over Temperature with Visual LED Indication.
Power Supply: AC 220V 50 Hz.
Dimension: 483 (W) x 425 (D) x 155 (H) mm. | Weight: 20.960 kg. (approx.)

PBT502

500 Watts RMS Output at 2 / 4 Ohms. 70 / 100 Volts. | Output Level LED.
3 Way Tone Control. | Horn / Speaker Switch. | Force Cooling.
Input Line 1V / 10K Ohms. | Protection: AC Bi-Metal Circuit Breaker,
Short Circuit & Over Temperature with Visual LED Indication.
Power Supply: AC 220V 50 Hz.
Dimension: 483 (W) x 425 (D) x 155 (H) mm. | Weight: 20.980 kg. (approx.)

▶ MULTI INPUT POWER AMPLIFIER

MA516

500 Watts RMS Output at 2 / 4 Ohms. | 70 / 100 Volts.
2 Way Tone Control. | Horn / Speaker Switch. | Force Cooling.
Master Control. | Input 6 Mic. / 2 AUX. | Output Bar Graph LED.
Protection: AC Bi-Metal Circuit Breaker, Short Circuit &
Over Temperature with Visual LED Indication.
Power Supply: AC 220v 50 Hz.
Dimension: 483 (W) x 425 (D) x 155 (H) mm. | Weight: 19.070 kg. (approx.)

MA515

500 Watts RMS Output at 2 / 4 Ohms. | 70 / 100 Volts. | 2 Way Tone Control.
Master Control. | Horn / Speaker Switch. | Input 6 Mic. / 2 AUX.
MP3 Player with Recording | USB/MMC Card Slot with LCD Display & Remote.
Protection: AC Bi-Metal Circuit Breaker, Short Circuit &
Over Temperature with Visual LED Indication.
Power Supply: AC 220v 50 Hz.
Dimension: 483 (W) x 425 (D) x 155 (H) mm. | Weight: 19.170 kg. (approx.)

PBT252

250 Watt RMS at 4/8 Ohms, 70/100 Volt | 2 Way Tone Control.
Horn / Speaker Switch | Master Control | Input 6 Mic/2 Aux.
Protection: DC Bi-Metal Circuit Breaker & AC Glass Fuse.
Power Supply: 220V AC 50Hz $\pm 10\%$ / 24 V Battery.
Dimension: 483(W) x 405(D) x 155(H) mm
Weight: 16.030 kg. (approx.)

MA251

250 Watts RMS Output at 4 / 8 Ohms. | 70 / 100 Volts. | 2 Way Tone Control.
Horn / Speaker Switch | Master Control.
MP3 Player with Recording | USB/MMC Card Slot with LCD Display & Remote.
Input 6 Mic. / 2 AUX.
Protection: DC Bi-Metal Circuit Breaker & AC Glass Fuse.
Power Supply: AC 220v 50 Hz $\pm 10\%$ / 24v Battery.
Dimension: 483 (W) x 405 (D) x 155 (H) mm. | Weight: 15.890 kg. (approx.)



➤ MULTI INPUT POWER AMPLIFIER



MA161

160 Watt RMS at 4/8 Ohms, 70/100Volt | 2 Way Tone Control.
Horn / Speaker Switch Master Control | Input 6 Mic / 2 Aux.
MP3 Player with Recording | USB/MMC Card Slot with LCD Display & Remote.
Protection: DC Bi-Metal Circuit Breaker & AC Glass Fuse.
Power Supply: 220V 50Hz AC \pm 10% / 24V Battery.
Dimension : 483(W) X 405(D) X 155(H) mm
Weight : 12.560 kg (approx.)



MCU100

100 Watt RMS Output at 4 / 8 / 16 Ohms 70/100 Volts.
Input 4 Mic / 1 Aux. | 3 Way Tone Control. | Master Control.
Output Bar Graph LED. | Horn / Speaker Switch.
MP3 Player with Recording | USB/MMC Card Slot with LCD Display & Remote.
Protection: DC Circuit Breaker for Overload & AC Glass Fuse.
Power Supply: AC 220V 50 Hz / 12V Battery.
Dimension: 416 (W) x 320 (D) x 130 (H) mm | Weight: 8.350 kg. (approx.)



MCU45

45 Watt RMS Output at 4 / 8 / 16 OHMS.100 Volts.
Input 3Mic. / 1 Aux. / MP3 Player. | 2 Way Tone Control. | Digital Echo.
MP3 Player with Recording | USB/MMC Card Slot with LCD Display & Remote.
Power Supply: AC 220V 50 Hz / 12V Battery.
Dimension: 342 (W) x 235 (D) x 110 (H) mm.
Weight: 4.640 kg. (approx.)

➤ AUDIO EQUIPMENT

TBA20 [TALK BACK AMPLIFIER]

Voice range amplifier suitable to drive Headset with Mic. upto 10 Nos.
for Studio Communications.
6.3 mm Stereo Socket for Mic. / Duplex Headset.
Output Individual Volume Control for Headset (10 Nos.).
Input Gain Control for Microphone & Auxiliary Sensitivity.
Power Supply: AC 220V 50 Hz.
Dimension: 483 (W) x 245 (D) x 78 (H) mm | Weight: 3.400 kg. (approx.)



DA20 [DISTRIBUTOR AMPLIFIER]

Input Attenuate Control for Left & Right.
Drive 10 Stereo Amplifiers or 20 Mono Amplifiers.
Input Impedance 10K Ohms unbalance (1/4" Jack).
Output Impedance 300 Ohms unbalance (1/4" Jack).
Frequency: 10 Hz - 20 KHz. | Power Supply: AC 220V 50 Hz.
Dimension: 483 (W) x 230 (D) x 64 (H) mm. | Weight: 2.520 kg. (approx.)



DA8 [DISTRIBUTOR AMPLIFIER]

Input Attenuate Control (4 Zone) | Drive 2 x 4 Zone
Input Impedance 10K Ohms unbalance (1/4" Jack).
Output Impedance 300 ohms unbalance (1/4" Jack).
All outputs are isolated to minimise hum and interference
All Channels with Phase Shift Switch | Frequency: 10 Hz - 20 KHz.
Power Supply: AC 220v 50 Hz.
Dimension: 483 (W) x 190 (D) x 28 (H) mm | Weight: 2.650 kg. (approx.)



AUDIO EQUIPMENT

DAX20 [DISTRIBUTOR AMPLIFIER]

Input Attenuate Control for Left & Right & Mono Switch.
 Drive 10 Stereo Amplifiers or 20 Mono Amplifiers.
 Input Impedance 10K Ohms balance (1/4" Jack & XLR Socket).
 Output Impedance 300 Ohms balance (XLR Socket).
 Frequency: 10 Hz - 20 KHz. I Power Supply: AC 220V 50 Hz.
 Dimension: 483 (W) x 215 (D) x 75 (H) mm. I Weight: 2,800 kg. (approx.)

Q215 [GRAPHIC EQUALISER]

Dual 15 band EQ, with ± 12 dB. I Output Level LED.
 25 Hz to 16 KHz effective equalization range.
 By-Pass Switch with Status LED. I XLR and 1/4" inputs.
 Outputs for balanced and Un-balanced Operation.
 Power Supply: AC 220V 50 Hz.
 Dimension: 483 (W) x 252 (D) x 64 (H) mm. I Weight: 3,140 kg. (approx.)

HA8X [HEAD PHONE AMPLIFIER]

Drive 8 Stereo Headphone from LINE/AUX Source.
 Individual Gain Control for Left and Right Channels.
 Power Supply: AC 220V 50 Hz.
 Dimension: 483 (W) x 215 (D) x 64 (H) mm. I Weight: 2,480 kg. (approx)

ACM2X [ACTIVE CROSSOVER - 2WAY STEREO]

Crossover Selectable Frequency:- 68 Hz to 480 Hz & 680 Hz to 4.8 KHz
 by selected switch.
 Individual Output Control for Both Frequency Bands.
 Power Supply: AC 220V 50 Hz.
 Dimension: 485 (W) x 200 (D) x 62 (H) mm. I Weight: 2,510 kg. (approx)

DI-2 [ACTIVE DIRECT BOX]

Input Guitar convert to Low-Impedance I Balanced or Unbalanced
 Operates on a 9V Battery or Panthom power from Mixer
 Phase Reversal & Ground lifting Switch.
 Dimension: 130(W) x 95(D) x 45(H) mm. I Weight: 0,390 kg. (approx)

DIGITAL ECHO

SP8001 [DIGITAL SOUND PROCESSOR]

Echo & Reverb / Chorus separate section to use separately or
 mixed mode. Individual Control.
 Echo Switch to select 3 modes Echo and mixed 2 modes.
 Reverb / Chorus – Depth & Duration Controls (Parameter).
 Input 2 Mic. & Aux IN / OUT. I Output level LCD display.
 Bass & Treble Effects. I Effects On / Off Switch.
 Option to operate direct Mic. through Mixer
 Power Supply: AC 220V 50 Hz.
 Dimension: 428 (W) x 208 (D) x 105 (H) mm. I Weight: 3,320 kg. (approx.)

DE403 [MULTI MODE DIGITAL ECHO]

3 Mode Digital Echo. I 3 Mic. & Aux Input.
 Echo Depth & Delay Time
 Feedback Control Option to Operate Direct Mic. / Mixer.
 Power Supply: AC 220V 50 Hz / 12V DC.
 Dimension: 345 (W) x 175 (D) x 50 (H) mm. I Weight: 1,670 kg. (approx.)

DE401 [DIGITAL ECHO]

3 Mic. & Aux Input. I Echo Depth & Delay Time
 Feedback Control Option to Operate Direct Mic. / Mixer.
 Power Supply: AC 220V 50 Hz / 12V DC.
 Dimension: 255 (W) x 175 (D) x 50 (H) mm.
 Weight: 1,260 kg. (approx.)



AUDIO MIXER

SM1603E/1203E [16/12 Channel Audio Mixer]

Balanced (Input & Output), Balanced XLR,
 Frequency Response 25 Hz – 20 KHz. | Digital Echo 20 – 400 Mili Sec.
 60 mm Long Taper Faders.
 Mic. Input 2K Ohms. Line Input 20K Ohms Balanced / 42 dB.
 Gain: -10 dB to -72 dB. S/N Ratio 89 dB. Distortion 0.01%.
 Main Out (L+R) XLR Balanced / Unbalanced PL Socket.
 Stereo RCA Output for Recording.
 3 Band Active EQ on each Channel (Low, Mid & High).
 2 AUX send (Pre-fader & Post-fader) level, Pan Control, L & R, Mono & Mute Switch on each Channel.
 Power Supply: 23VA Max / 19VA Max @ AC 220V / 50 Hz. (External Adapter)
 Dimension: 662 (W) x 380 (D) x 110 (H) mm. | Weight: 6.600 kg. (approx.)
 Dimension: 543 (W) x 380 (D) x 110 (H) mm. | Weight: 5.530 kg. (approx.)

SM1242E [12 Channel Audio Mixer]

Un-Balanced (Input & Output) Echo mixer
 Frequency response 25 Hz - 20 kHz | Digital Echo 20 - 400 mili sec.
 30mm long taper fader | Mic Input 2k ohms | Mono Line Input 10k ohm
 Gain : -10 dB TO -72 dB | S/N Ratio 70dB Distortion 0.01%
 4 Band Active Tone Control on each channel (Bass, Low-Mid, High-Mid & High)
 2 Aux send (Pre-fader & Post fader) Level and Pan Control on each channel
 Output Metering 10 Segment LED
 Power Supply : 11 VA Max @ 220V AC 50Hz ± 10% (External Adapter)
 Dimension : 465(W) x 355(D) x 105(H)mm. | Weight: 5.030 kg (approx.)

SM1202E [12 Channel Audio Mixer]

Un-Balanced (Input & Output) Echo Mixer.
 Frequency Response 25 Hz – 20 KHz | Digital Echo 20 – 400 Mili Sec.
 30 mm Long Taper Faders | Mic Input 2K Ohms | Mono line input 10K Ohms.
 Gain: -10 dB to -50 dB. S/N Ratio 70 dB. Distortion 0.01%.
 Stereo RCA Output for Recording. | Un-balanced Output Connector.
 3 Band Active EQ on each Channel (Low, Mid & High).
 2 AUX send (Pre-fader & Post-fader), level & Pan Control on each Channel.
 Output Metering 10 segment LED.
 Power Supply: 11VA Max @ AC 220V / 50 Hz.
 Dimension: 510 (W) x 305 (D) x 110 (H) mm. | Weight: 5.100 kg. (approx.)

SM1202X [12 Channel Audio Mixer]

Balanced (Input / Output), | Frequency Response 25 Hz – 20 KHz.
 Digital Echo 20 – 400 Mili Sec.
 60 mm Long Taper Faders. Monitor for Headphone Control.
 Mic. Input 2K Ohms. Line Input 20K Ohms.
 Gain: -10 dB to -60 dB. S/N Ratio 89 dB. Distortion 0.01%.
 Main Out (L+R) XLR Balanced / Unbalanced PL Socket.
 Stereo RCA Output for Recording.
 3 Band Active EQ on each Channel (Low, Mid & High).
 3 AUX send (Pre-fader & Post-fader), level & Pan Control each Channel.
 Power Supply: 21VA Max @ AC 220V / 50 Hz. (External Adapter)
 Dimension: 545 (W) x 395 (D) x 120 (H) mm. | Weight: 5.650 kg. (approx.)

SM120E/800E [12/8 Channel Audio Mixer]

Un-Balanced (Input / Output), | Frequency Response 25 Hz – 20 KHz.
 Digital Echo 20 – 400 mili Sec. | Fader 30 mm for each Channel.
 Mic Input 2K Ohms. Mono Line Input 10K Ohms.
 Gain: -10 dB to -50 dB, S/N Ratio 70 dB. Distortion 0.01%.
 Tone Control: Bass ±16 dB, Mid ±10 dB & Treble ±16 dB.
 Effect Return: -30 dB Max. Effect Send (Pre Fader): 0 dB to 5.5V Max.
 Channel Signal Indication Clip LED. | Output Metering 10 segment LED.
 Power Supply: 11VA / 9VA Max @ AC 220V / 50 Hz (External Adapter).
 Dimension: 465 (W) x 355 (D) x 105 (H) mm. | Weight: 4.440 kg. (approx.)
 Dimension: 355 (W) x 355 (D) x 105 (H) mm. | Weight: 3.770 kg. (approx.)





SM120U/SM80U [12/8 Channel Audio Mixer with USB & Recording system]

Un-Balanced (Input / Output). I Frequency Response 25 Hz – 20 KHz.
 Digital Echo 20 – 400 mili Sec. I Fader 30 mm for each Channel.
 Mono Line Input 10K Ohms.
 Mic. Input 2K Ohms. Gain: -10 dB to -50 dB. S/N Ratio 70 dB,
 Distortion 0.01%. I Tone Control: Bass ± 16 dB, Mid ± 10 dB & Treble ± 16 dB.
 Effect Return: -30 dB Max. Effect Send: 5.5V Max.
 Channel Signal Indication Clip LED. Main Output Metering 10 segment LED.
 MP3 Player with Recording I USB / MMC Card Slot with LCD Display & Remote.
 Power Supply: 11VA / 9VA Max @ AC 220V / 50 Hz (External Adapter).
 Dimension: 465 (W) x 355 (D) x 105 (H) mm. I Weight: 4.910 kg. (approx.)
 Dimension: 355 (W) x 355 (D) x 105 (H) mm. I Weight: 3.980 kg. (approx.)




SM1032E [10 Channel Audio Mixer]

Un-Balanced (Input & Output) Echo Mixer.
 Frequency Response 25 Hz – 20 KHz I Digital Echo 20 – 400 Mili Sec.
 Mic. Input 2K Ohms I Mono Line Input 10K Ohms.
 Gain: -10 dB to -50 dB. S/N Ratio 70 dB. Distortion 0.01%.
 30mm Fader for each Channel. Un-balanced Output Connector.
 3 Band Active EQ on each Channel (Low, Mid & High).
 2 AUX send (Pre-fader & Post-fader), level & Pan Control on each Channel.
 Output Metering 10 segment LED I Stereo RCA Output for Recording.
 Power Supply: 11VA Max @ AC 220V / 50 Hz (External Adapter)
 Dimension: 465 (W) x 355 (D) x 105 (H) mm. I Weight: 4.800 kg. (approx.)



SXR32 / SXR24 [32/24 Channel Audio Mixer with USB & Recording system]

Balanced & Un-Balanced (input & Output) I 24/32 Input
 48 V phantom power in all channels
 4 Band Channel EQ (High, High Mid, Low Mid, Low) I 100 Long taper fader
 Frequency Response 20Hz – 20kHz I Gain: - (+0db) – (-60db)
 4 Aux (3 pre fader & 1 post fader) I Built-in DSP digital 99 Effects
 1 – 4 Channel Compressor I 9-band stereo graphic equaliser
 MP3 Player with Recording & USB
 PAN Control, Mute Switch, Group Switch, PFL Switch in each Channel
 Power Supply: 220V AC 5Hz.
 Dimension: 840(W) X 542(D) X 150(H) mm I Weight: 12.400 kg.
 Dimension: 1090(W) X 550(D) X 140(H) mm I Weight: 15.600 kg

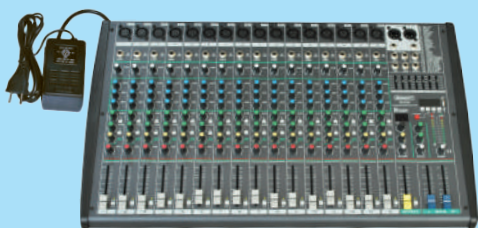

SXR16 [16 Channel Audio Mixer with USB & Recording system]

Balanced (Input & Output) Echo mixer I 16 Inputs I 48V phantom power
 3 band channel EQ. (High, Mid & Low)
 Frequency response 25 Hz - 20 kHz I 60mm long taper fader
 Gain : -10 dB to -60 dB I S/N Ratio 89 dB Distortion 0.01%
 3 Aux send (Pre-fader & Post fader) I Built-in DSP digital
 7-band stereo graphic equilliser I MP3 Player with Recording & USB
 Power Supply : 220V AC 50Hz (External Adapter)
 Dimension : 625(W) x 390(D) x 90(H)mm. I Weight : 6.660 kg (approx.)



SXR12 [12 Channel Audio Mixer with USB & Recording system]

Balanced (Input & Output) Echo mixer I 12 Inputs I 48V phantom power
 3 band channel EQ. I Frequency response 25 Hz - 20 kHz
 60mm long taper fader I Gain : -10 dB TO -60 dB
 S/N Ratio 89 dB Distortion 0.01%
 3 Band Active Eq. on each channel (High, Mid & Low)
 2 Aux send (Pre-fader & Post fader)
 Level and Pan Control each channel & Mute switch
 Built-in DSP digital effects I 7-band stereo graphic equaliser I
 MP3 Player with Recording & USB
 Power Supply : 21 VA Max @ 220V AC 50Hz $\pm 10\%$ (External Adapter)
 Dimension: 465(W) x 390(D) x 85(H)mm. I Weight: 5.820 kg (approx.)

AUDIO MIXER



SXR6 [6 Channel Audio Mixer with USB & Recording system]

6 Channels Stereo Echo Mixer.
 Digital Echo 20 – 400 m/s. Frequency 25 Hz – 25 KHz.
 MP3 Player with Recording & USB
 Input Gain: – 50 dB to 6 dB gain range with overdrive indication.
 Output 0 dBm / 17 dBm (775mv / 5.5v)
 Equalization: Bass, Mid & Treble ± 5 dB | Output metering 10 segment LED
 Controls: Gain, Eq., Pan, Echo, Fader.
 Power Supply: AC 220V 50 Hz (External Adapter)
 Dimension: 230 (W) x 245 (D) x 50 (H) mm. | Weight: 1.780 kg. (approx.)



SM6 [6 Channel Audio Mixer]

6 Channels Stereo Echo Mixer.
 Digital Echo 20 – 400 m/s. Frequency 25 Hz – 25 KHz.
 Input Gain: – 50 dB to 6 dB gain range with overdrive indication.
 Output 0 dBm / 17 dBm (775mv / 5.5v) | Equalization: Bass & Treble ± 5 dB.
 Controls: Gain, Eq., Pan, Echo, Fader.
 Power Supply: AC 220V 50 Hz (External Adapter)
 Dimension: 290 (W) x 165 (D) x 80 (H) mm. | Weight: 1.590 kg (approx.)



UM6 [6 Channel Audio Mixer with USB & Recording system]

6 Channels Stereo Echo Mixer.
 Digital Echo 20 – 400 m/s. Frequency 25 Hz – 25 KHz.
 MP3 Player with Recording | USB & MMC Card Slot & Remote.
 Input Gain: – 50 dB to 6 dB gain range with overdrive indication.
 Output 0 dBm / 17 dBm (775mv / 5.5v) | Equalization: Bass & Treble ± 5 dB.
 Controls: Gain, Eq., Pan, Echo, Fader.
 Power Supply: AC 220V 50 Hz (External Adapter)
 Dimension: 290 (W) x 165 (D) x 80 (H) mm. | Weight: 1.650 kg (approx.)



MM5 [5 Channel Audio Mixer]

5 Channels Audio Mixer. | Frequency 25 Hz – 25 KHz.
 Input Gain: – 50 dB to 8 dB gain range with overdrive indication.
 Output 0 dBm / 17 dBm (775mv / 5.5v)
 Equalization: Bass & Treble ± 10 dB each channel and Master Equalization.
 Controls: Gain, Fader, 2 Master Control. | Power Supply: AC 220V 50 Hz.
 Dimension: 220 (W) x 150 (D) x 65 (H) mm. | Weight: 1.200 kg (approx.)



MM4 [4 Channel Audio Mixer]

4 Channels Audio Mixer. | Frequency 25 Hz – 20 KHz.
 Input: 3 Mic & 1 AUX. Separate Volume Control for each input.
 Output: 1V/600 Ohms (Max 3.5V). | Master Control
 Overload LED for setting optimum Distortion Free Input Level.
 Power Supply: AC 220V 50 Hz.
 Dimension: 180 (W) x 100 (D) x 45 (H) mm. | Weight: 650 g (approx.)



UM3 [3 Channel Audio Mixer with USB, Recording & Cordless]

3 Channel Stereo Echo Mixer. | Digital Echo 20 – 400 m/s.
 MP3 Player with USB Recording (WAV/MP3)
 Cordless Microphone with inbuilt receiver.
 Output Metering 4 Segment LED. | Equalization: Low & High ± 12 dB.
 Controls: Gain, Eq, Pan, Echo.
 Power Supply: AC 220 V 50 Hz (External Adapter)
 Dimension: 290 (W) x 165 (D) x 80 (H) mm. | Weight: 1.690 kg. (approx.)

▶ **POWER MONITOR**



PM120 [POWERED MONITOR]

120 Watts RMS | 12" Heavy Duty Speaker & Horn Tweeter.
 Aux 1V / 10V Ohms Balance. | Bass & Treble Control.
 All Plywood Carpet Finish Metal Grill & Compact Size.
 Power Supply: AC 220V 50 Hz.
 Dimension: 550 (W) x 375 (D) x 440 (H) mm.
 Weight: 16.590 kg (approx.)

▶ **MUSICAL AMPLIFIER**



RM120 [GUITAR, BASS GUITAR & KEYBOARD]

RM120 Head Delivers 120 Watts RMS Power at 8 Ohms.
 3 Fully Independent Input Channels. i) Bass Guitar Channel with Low / High Tone Control & 6 Band Graphic Equalizer with Compressor Limiter.
 ii) Keyboard Channel with Low / High Tone Control and Reverb Mix Switch.
 iii) Guitar Channel with 3 Band Equalizer,
 Reverb effect control & Overdrive Effect Switch & Line Out.
 Compact Carpet Finish Cabinet. | Power Supply: AC 220V 50 Hz.
 Dimension: 515 (W) x 308 (D) x 140 (H) mm. | Weight: 8.400 kg (approx.)



BASSMAN 20 [BASS GUITAR]

Bassman 20 Head Delivers 120 Watts RMS Power at 8 Ohms.
 One Channel Two Input for Bass Guitar Amplifier.
 6 Band Graphic Equalizer with Bright Switch & Line Out.
 Compact Carpet Finish Cabinet. | Power Supply: AC 220V 50 Hz.
 Dimension: 420 (W) x 275 (D) x 130 (H) mm. | Weight: 6.930 kg (approx.)

▶ **MUSICAL AMPLIFIER WITH SPEAKER**



PM192 [Guitar, Octopad /Keyboard & Mic]

190 Watts Output. | 15" Speaker & 2 Tweeter.
 3 Channels with Individual Controls.
 Mic. (Low Impedance), Aux for (Octopad / Keyboard)
 1v/10K Ohms (Stereo Input) & Guitar (Lead Guitar).
 Tone Control: Bass, Low-Mid, Hi-Mid & Treble ± 10 dB.
 Clip Control Switch to Minimize Overdrive.
 Metal Grill & Plywood Carpet Finish.
 Power Supply: AC 220v 50 Hz.
 Dimension: 550 (W) x 280 (D) x 580 (H) mm. | Weight: 23.220 kg (approx.)



PM162 [Vocal, Guitar , Auxiliary & MP3 Player]

160 Watts Output. | 12" Speaker & Horn Tweeter
 3 Channels With Individual Controls. | Effects: Digital Vocal Echo.
 Built in Cordless Receiver & Microphone
 MP3 Player with Recording | USB & MMC Card Slot & Remote.
 Tone Control: Bass, Mid & Treble ± 10 dB
 Compact Size, Metal Grill & Plywood Carpet Finish
 MP3 Player. Line Out | Power Supply : AC 220V 50Hz
 Dimension : 410(W) x 295(D) x 550(H) mm | Weight : 18.570 kg (approx.)



PM102 [GUITAR, OCTAPAD / KEYBOARD & MIC]

120 Watts Output. | 12" Speaker & Horn Tweeter.
 3 Channels with Individual Controls. | Mic. (Low Impedance),
 Aux for (Octopad / Keyboard) 1V/10K Ohms (Stereo Input) &
 Guitar (Lead Guitar). | Tone Control: Bass, Low-Mid, Hi-Mid & Treble ± 10 dB.
 Master Control. | Compact Size, Metal Grill & Plywood Carpet Finish.
 Power Supply: AC 220V 50 Hz.
 Dimension: 400 (W) x 380 (D) x 500 (H) mm.
 Weight: 16.920 kg (approx.)



CS100 [Combo Stereo Amplifier]

2 x 50 Watt Output | 2 x 8" Speaker & Tweeter.
 4 INPUT [Guitar, Mic, Auxiliary (Stereo), MP3 (Bluetooth) with Recording],
 Tone Control (Bass & Treble ± 10 dB) | Effect: Digital Echo.
 Compact Size, Metal Grill & Plywood Carpet Finish | Line Out (Stereo).
 Power Supply : 220V AC 50Hz $\pm 10\%$.
 Dimension : 500(W) x 275(D) x 370(H) mm.
 Weight: 12.540 kg. (approx.)



C80R [GUITAR, AUXILIARY & MIC]

80 Watts RMS with 12" Speaker.
 3 Way Tone Control Bass, Mid & Treble ± 10 dB.
 Master Control.
 3 Independent Channels & Line Out.
 Digital Effect Processor (24 Effects) Number display & Over Drive.
 Compact Size, Metal Grill & Plywood Rexine Finish.
 Power Supply: AC 220V 50Hz.
 Dimension: 390 (W) x 280 (D) x 475 (H) mm.
 Weight: 13.300 kg (approx.)



CUBE80E [GUITAR, KEYBOARD & MIC]

80 Watts RMS | 12" Speaker
 3 Way Tone Control Bass, Mid & Treble ± 10 dB.
 3 Input 2 Channels for Guitar, Keyboard, 1 Mic. (Low Impedance) &
 Line Out | Digital Echo.
 Compact Size, Metal Grill & Plywood Rexine Finish.
 Power Supply: AC 220V 50 Hz.
 Dimension: 380 (W) x 280 (D) x 480 (H) mm.
 Weight: 13.250 kg (approx.)



CUBE40E [GUITAR, KEYBOARD & MIC]

40 Watts RMS | 12" Speaker
 3 Way Tone Control Bass, Mid & Treble ± 10 dB.
 3 Input 2 Channels for Guitar, Keyboard & 1 Mic. (Low Impedance) &
 Line Out. | Digital Echo.
 Compact Size, Metal Grill & Plywood Rexine Finish.
 Power Supply: AC 220V 50 Hz.
 Dimension: 360 (W) x 255 (D) x 430 (H) mm. | Weight: 11.000 kg (approx.)



C44 [VOCAL, GUITAR & AUX, MP3 Player]

40 Watts Output with 10" Speaker & Horn Tweeter.
 Effects: Digital Vocal Echo. | Built in Cordless Receiver & Microphone.
 Tone Control: Bass & Treble ± 10 dB | 3 Channels With Individual Controls.
 MP3 Player with Recording, Line Out.
 Compact Size Metal Grill & Plywood Rexine Finish
 Power Supply : AC 220V 50Hz / 12v DC Built in Lithium Ion Battery.
 Auto Change Over & Rechargeable Type
 Dimension : 355(W) x 250(D) x 425(H) mm | Weight : 8.600 kg (approx.)



PM40 [OCTAPAD / KEYBOARD, BASS GUITAR & MIC]

40 Watts. | 6" Speaker & Tweeter. | Effect: Digital Echo.
 Line Out.
 Mic. (Low Impedance), Aux for (Octopad / Keyboard)
 1V/10K Ohms & Bass Guitar. | Tone Control: Bass & Treble ± 10 dB.
 Compact Size, Metal Grill & Plywood Rexine Finish.
 Power Supply: AC 220V 50 Hz.
 Dimension: 235(W) X 255(D) X 335(H) mm. | Weight: 6.020 kg (approx.)



NS35 [MIC & GUITAR]

35 Watts RMS with 10" Speaker.
 3 Way Tone Control Bass, Mid & Treble ± 10 dB.
 Master Control.
 2 Independent Channels & Line Out
 Digital Effect Processor (24 Effects) | Numbering Display & Over Drive.
 Compact Size, Plywood Rexine Finish. | Metal Grill.
 Power Supply: AC 220v 50 Hz.
 Dimension: 480 (W) x 255 (D) x 420 (H) mm
 Weight: 9.290 kg. (approx.)

STUDIO30 [MIC & GUITAR]

30 Watts RMS With 10" Speaker.
 2 Way Tone Control: Bass & Treble + 10 db.
 2 Independent Channels & Line Out.
 Effect: Digital Reverb.
 Compact Size, Metal Grill & Plywood Rexene Finish.
 Power Supply: AC 220 V 50 Hz.
 Dimension: 480 (W) x 255 (D) x 420 (H) mm.
 Weight: 9.450 kg. (approx.)

NS30E [GUITAR & KEYBOARD]

30 Watts RMS. | 10" Heavy Duty Speaker | Line Out and Pre-Out.
 2 Input 1 Channel for Guitar / Keyboard.
 Tone Control: Bass, Mid & Treble ± 10 dB.
 Effects: Distortion & Digital Echo.
 Compact Size, Metal Grill & Plywood Rexine Finish.
 Power Supply: AC 220V 50 Hz.
 Dimension: 370 (W) x 230 (D) x 395 (H) mm. | Weight: 9.200 kg (approx.)

C29M [VOCAL, KEYBOARD & AUX, MP3 Player with Cordless Microphone]

20 Watts RMS Output with 8" Dual Cone Speaker.
 Effects: Digital Vocal Echo. (Mic. 1)
 Built in Cordless Receiver & Microphone.
 3 Mic. Low Impedance / 1 Aux. / MP3 Player with Recording. | Line Out.
 Compact Size, Moulded Grill & Plywood Rexine Finish.
 Power Supply: AC 220V 50 Hz / 12V DC Built in Lithium ion Battery.
 Auto Changeover & Rechargeable type.
 Dimension: 280 (W) x 163 (D) x 340 (H) mm.
 Weight: 5.650 kg (approx.)

C28 [VOCAL, KEYBOARD, AUXILIARY & MP3 Player]

20 Watts RMS Output with 8" Dual Cone Speaker.
 Digital Vocal Echo (Mic. 1). | Tone Control Bass & Treble ± 10 dB.
 3 Mic. Low Impedance / 1 Aux. / MP3 Player with Recording. | Line Out.
 Compact Size, Moulded Grill & Plywood Rexine Finish.
 Power Supply: AC 220V 50 Hz / 12V DC Built in Lithium ion Battery.
 Auto Changeover & Rechargeable type.
 Dimension: 280 (W) x 163 (D) x 340 (H) mm. | Weight: 5.390 kg (approx.)

**CUBE24 [VOCAL, KEYBOARD & AUXILIARY]**

20 Watts RMS with 8" Dual Cone Speaker. | Digital Vocal Echo (Mic. 1).
Tone Control Bass & Treble ± 10 dB.
3 Mic. Low Impedance, 1 Aux. (10K Ohms)
Line Out
Compact Size, Moulded Grill & Plywood Rexine Finish.
Power Supply: AC 220V 50 Hz, 12V DC Built in Lithium ion Battery.
Auto Changeover & Rechargeable type.
Dimension: 280 (W) x 163 (D) x 340 (H) mm.
Weight: 4.890 kg (approx.)

**C27 [GUITAR, KEYBOARD, MIC & MP3 Player]**

20 Watts RMS Output with 8" Dual Cone Speaker.
Effects: Digital Echo & Distortion. | Tone Control Bass, Mid & Treble ± 10 dB.
3 Individual Channels / MP3 Player with Recording | Line Out & Headphone.
Compact Size, Moulded Grill & Plywood Rexine Finish.
Power Supply: AC 220V 50 Hz. / 12V Battery.
Dimension: 280 (W) x 163 (D) x 340 (H) mm.
Weight: 4.920 kg (approx.)

**C20R [GUITAR & MIC]**

20 Watts RMS | 8" Dual Cone Speaker.
2 Input for Guitar & Mic & Line Out.
3 Way Tone Control Bass, Mid & Treble ± 10 dB.
Frequency Response 50 Hz. – 15 kHz. | Digital Reverb & Chorus
AC Mains Fuse Protection & Mains On LED Indication.
Compact Size, Moulded Grill & Plywood Rexine Finish.
Power Supply: AC 220V 50 Hz.
Dimension: 280 (W) x 163 (D) x 340 (H) mm.
Weight: 4.800 Kg (approx)

**CUBE20M [GUITAR, KEYBOARD & MIC]**

20 Watts RMS Output. | 8" Dual Cone Speaker.
3 Way Tone Control Bass, Mid & Treble ± 10 dB.
3 Input 2 Channels for Guitar / Keyboard & 1 Mic. (Low Impedance),
Line Out, Pre-Out and Headphone.
Power Supply: AC 220V 50 Hz.
Dimension: 275 (W) x 153 (D) x 300 (H) mm.
Weight: 4.800 kg (approx.)

**C20 [GUITAR, KEYBOARD & MIC]**

20 Watts RMS | 8" Dual Cone Speaker.
3 Way Tone Control Bass, Mid & Treble ± 10 dB.
3 Individual Channels for Guitar, Keyboard & 1 Mic. (Low Impedance),
Line Out and Headphone.
Compact Size, Metal Grill & Plywood Rexine Finish.
Power Supply: AC 220V 50 Hz.
Dimension: 275 (W) x 153 (D) x 300 (H) mm.
Weight: 4.640 kg (approx.)

**C15 [GUITAR, KEYBOARD & MIC]**

15 Watts RMS Output with 6" Speaker.
Effects: Digital Echo & Distortion.
3 Way Tone Control Bass, Mid & Treble.
3 Input 2 Channels, Line Out / Headphone.
Compact Size, Metal Grill & Plywood Rexine Finish.
Power Supply: AC 220V 50 Hz.
Dimension: 242 (W) x 158 (D) x 245 (H) mm.
Weight: 3.550 kg (approx.)



C6 [GUITAR, KEYBOARD, MIC & MP3 Player]

6 Watts RMS output with 5" Speaker.
 Effects: Digital Echo & Overdrive. | 2 Way Tone Control Bass & Treble.
 3 Input 2 Channels. (Guitar / AUX / MP3 & Mic.)
 MP3 Player with Recording | USB & MMC Card Slot & Remote. | Line Out.
 Compact Size, Plywood Rexine Finish.
 Power Supply: AC 220V 50 Hz / AA x 8 Battery.
 Dimension: 210 (W) x 155 (D) x 210 (H) mm.
 Weight: 2.640 kg (approx.)

▶ SPEAKER SYSTEM

HD225

2 Way Sound Reinforcement System.
 Twin 15" Speaker with 100 mm Voice Coil.
 Titanium Compression Driver with Horn.
 1300 Watts Prog. 2600 Watts Peak.
 Heavy Duty Cross Over. | Heavy Duty Metal Grill.
 Dimension: 570 (W) x 540 (D) x 1240 (H) mm.
 Weight: 58.320 kg (approx.)

HD215

2 Way Sound Reinforcement System.
 Twin 15" Speaker with 68 mm Voice Coil.
 Titanium Compression Driver with Horn.
 700 Watts Prog. 1400 Watts Peak.
 Heavy Duty Cross Over. | Heavy Duty Metal Grill.
 Dimension: 480 (W) x 380 (D) x 1240 (H) mm.
 Weight: 40.350 kg (approx.)

16H2

3 Way Sound Reinforcement System.
 15" with 54 mm Voice Coil & 12" Speaker with 45mm Voice Coil.
 2 Piezo Horn Tweeters.
 400 Watts Prog. 800 Watts Peak.
 Heavy Duty Metal Grill.
 Dimension: 640 (W) x 380 (D) x 800 (H) mm.
 Weight: 32.250 kg (approx.)

M122H

2 Way Sound Reinforcement System.
 Twin 12" Speaker with 45 mm Voice Coil.
 1 Piezo Horn Tweeter.
 300 Watts Prog. 600 Watts Peak.
 Heavy Duty Metal Grill.
 Dimension: 440 (W) x 360 (D) x 920 (H) mm.
 Weight: 26.100 kg (approx.)

15H4

2 Way Sound Reinforcement System.
 15" Speaker with 54 mm Voice Coil.
 1 Piezo Horn Tweeter. | 300 Watts Prog. 600 Watts Peak.
 Heavy Duty Metal Grill.
 Dimension: 480 (W) x 440 (D) x 650 (H) mm.
 Weight: 19.770 kg (approx.)



**M122**

Twin 12" Speaker with 45 mm Voice Coil.
240 Watts Prog. 480 Watts Peak. I Heavy Duty Metal Grill.
Dimension: 440 (W) x 360 (D) x 770 (H) mm.
Weight: 24.280 kg (approx.)

MATCHING SPEAKER SYSTEM FOR RM120 & BASSMAN 20

**12H7**

2 Way Sound Reinforcement System.
12" Speaker with 45 mm Voice Coil. I 1 Piezo Horn Tweeter.
150 Watts Prog. 300 Watts Peak. I Heavy Duty Metal Grill.
Dimension: 430 (W) x 355 (D) x 585 (H) mm.
Weight: 13.640 kg (approx.)

**L18**

Vented Subwoofer System.
600 Watts Program.
18" with 100 mm Voice Coil.
Internal Low – Pass Crossover Network.
Heavy Duty Metal Grill.
Dimension: 615 (W) x 583 (D) x 680 (H) mm.
Weight: 38.000 kg (approx.)

**CM15T**

Twin 6" X 4" Column Speaker with LMT.
Dimension: 165 (W) x 145 (D) x 442 (H) mm.
Weight: 3.500 kg (approx.)

**M124S / M124H**

Full Range Sound Reinforcement System.
500 Watts Program. 1000 Watts Peak.
400 Watts Program. 800 Watts Peak.
4 X 12" with 45 mm Voice Coil.
2 Piezo Horn Tweeters. I Heavy Duty Metal Grill.
Dimension: 755 (W) x 485 (D) x 830 (H) mm.
Weight: 44.300 kg (approx.)
Weight: 39.300 kg (approx.)

**M8**

Wall Speaker. I 8" with 26 mm Voice Coil with Built in LMT.
30 Watts Program.
Dimension: 292 (W) x 190 (D) x 315 (H) mm.
Weight: 3.440 kg (approx.)

▶ **PEDALS**



SVP2 [Stereo Volume Pedal (Optical)]

Battery Operated.
2 Inputs & 2 Outputs Socket.
0 Level Setting Control.
ABS Moulded Cabinet.
Dimension: 93 (W) x 215 (D) x 58 (H) mm.
Weight: 590 g (approx.)



PSP1

Patch Switch Pedal for Electronic Drum & Keyboard.
Normally Connected (NC) – Colour Black.
Dimension: 80 (W) x 90 (D) x 30 (H) mm.
Weight: 180 g (approx.)



PSP2

Twin Patch Switch Pedal for Electronic Drum.
Normally Connected (NC). Twin Switch for Effects Up/Down.
Dimension: 150 (W) x 90 (D) x 30 (H) mm.
Weight: 280 g (approx.)

▶ **POWER SUPPLY ADAPTER**

FOR GADGETS

PS1 - 12 Volt DC 500 mA. Max



FOR DD3 / RV3

PS1A - 9 Volt DC 500 mA. Max



FOR KEYBOARD

PS2 - 12 Volt DC 1 Amp. Max



FOR OCTAPAD

SPD11 & SPD20

PS4 - 12 Volt AC 1 Amp. Max



FOR KEYBOARD

SPS2 - 9/12 Volt DC 1 Amp. Max

SPS3 - 9/12 Volt DC 2 Amp. Max



PHANTOM POWER SUPPLY UNIT

PPS-48 - For 2 Microphone
IN/OUT Balance (XLR) | AC 220V 50 Hz



**NEW
LAUNCH**



C50 [VOCAL, GUITAR & AUX, MP3 Player]

50 Watts Output with 12" Speaker & Tweeter.
Effects: Digital Vocal Echo | Tone Control: Bass & Treble
3 Channels with Individual Controls.
MP3 Player with Recording.
Line Out, | Compact Size, Metal Grill & Plywood Rexine Finish.
Power Supply: AC 220V 50 Hz.
Dimension: 360 (W) x 255 (D) x 430 (H) mm.
Weight: 10,440 kg (approx.)



C10 [GUITAR, KEYBOARD, MIC]

10 Watts Class D Powered with 5" Speaker.
Effects: Digital Echo | 2 Way Tone Control.
3 Input Two Channels. (Guitar / Aux & Mic) | Line Out.
Compact Size, Plywood Regin Finish.
Power Supply: Power Supply: AC 220V 50 Hz | External adapter
Built in Lithium ion Battery.
Dimension: 210(W) x 155(D) x 210(H) mm.
Weight: 2,320 kg (approx.)



Please Check our HOLOGRAM before Buy.

STRANGER AUDIO PRIVATE LIMITED

R.O. : 3, Garanhatta Street, Kolkata - 700006, W.B., India
Ph. : +91 33 2555 5386

Factory : 17 & 18, Brindaban Basak Street, Kolkata - 700005, W.B. India
Ph. : +91 33 2533 4693. Mobile : 7439022855

E-mail : strangeraudiopvtltd@gmail.com

Website : www.strangeraudio.org / www.strangeraudio.in

KOLKATA - OUR HOME CITY